


■ DATASHEET

GABLE WINDOW

**FEATURES**

- **ELEGANT AESTHETICS**
Slim and modern aluminium frames with sightlines starting from just 53mm
- **ENERGY EFFICIENT**
58mm or 70mm deep thermally broken frame achieves U-Values as low as 1.4 W/m²K with a double glazed unit, and a B-C rating on the BFRC WER scheme
- **HEIGHTENED SECURITY**
PAS 24 and Secured By Design Certified, and in compliance with Part Q of the building regulations
- **GLAZING OPTIONS**
Internal or External Glazed with 28mm to 40mm glazing thickness
- **CHOICE OF FINISH**
Available in any single RAL colour, dual colour, textured or an anodised finish

TECHNICAL DRAWINGS

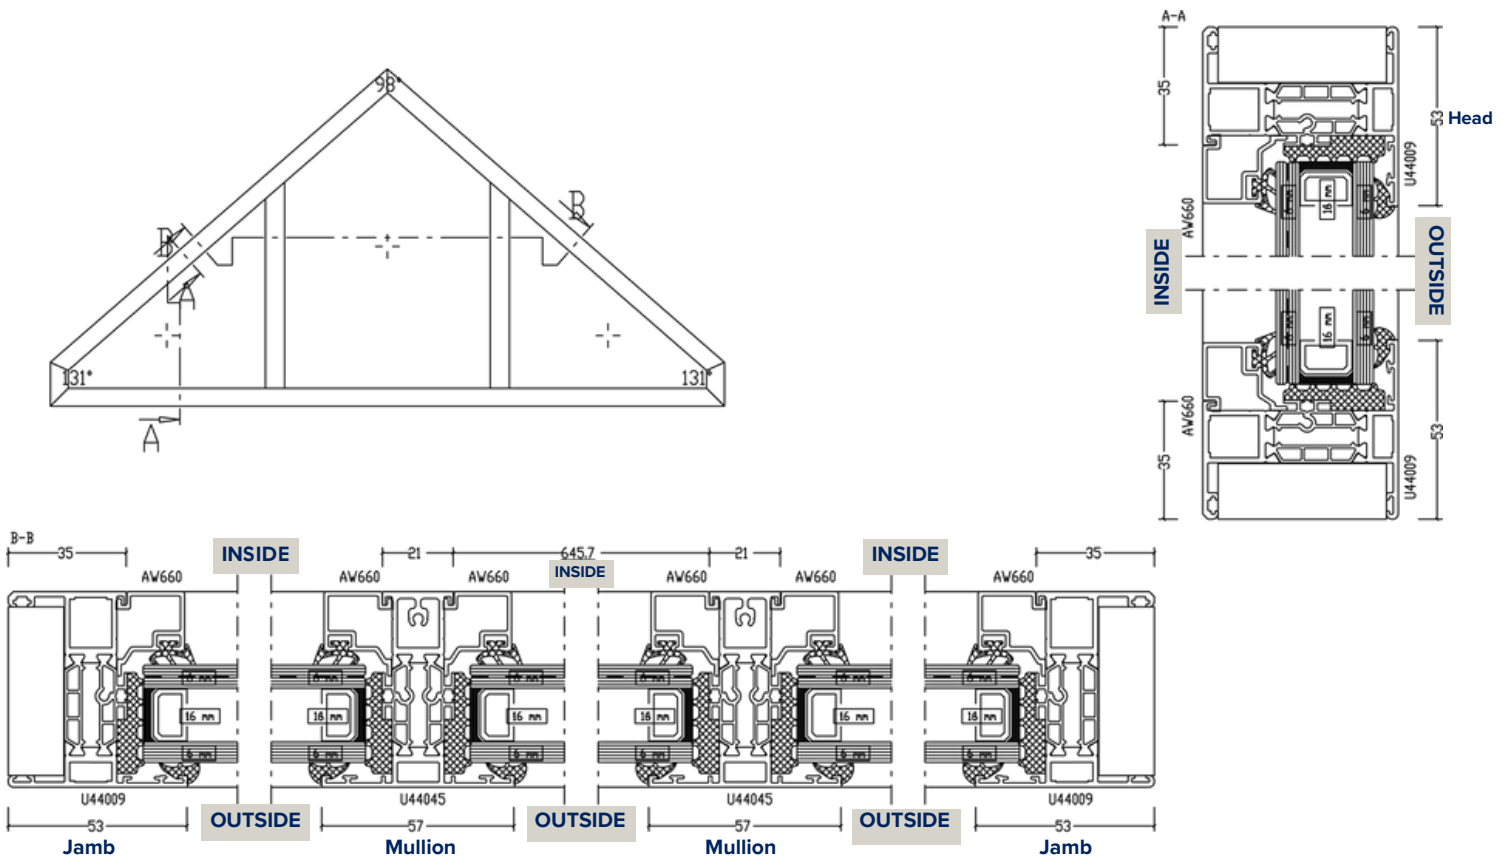

SIZE & WEIGHT LIMITS	
Fixed Light	
Max Width*	2500mm
Max Height*	2500mm
Max Weight	250kg

*NB: If gable window is to be fitted above a door, we recommend a steel beam is introduced between the window and door to support the deadload of the window. Please consult with a structural engineer.

PERFORMANCE	
U-Value (Double Glazing)	(U _g = 1.0 W/m ² K) 1.4 W/m ² K
U-Value (Triple Glazing)	(U _g = 0.8 W/m ² K) 1.2 W/m ² K
Window Energy Rating (WER)	B-C
BRE Green Guide Rating	A rated
Air Permeability	Class 4 (600 Pa)
Water Tightness	Class 9a (600pa)
Wind Resistance	Class E2400 (2400 Pa)
Acoustic Performance Rw	Rw (C;Ctr) 42 (-1;-5) dB
Security	PAS 24 & SBD
3rd Party Certification Q Mark	✓

SIGHTLINES	
Head	53mm
Cill	78mm
Jamb	53mm
Mullion	57mm

FINISHES	
Single Colour	✓
Dual Colour	✓
Textured Finish	✓
Anodised Finish	✓

BUILDING REGULATIONS	
Part L	Compliant
Part F	Compliant
Part M	Compliant
Part Q	Compliant

DETAILS	
Frame DePth	58 / 70mm
Glazing Thickness	28-40mm