

DATASHEET

LIFT AND SLIDE DOOR



FEATURES

BEAUTIFUL AESTHETICS

Slim and modern aluminium frames with sightlines starting from just 100mm

ENERGY EFFICIENT

Thermally broken frame achieves U-Values as low as 0.8 W/m²K with a double glazed unit

FLEXIBLE CONFIGURATIONS

Available in double track or triple track frames

EASY OPERATION

Smart lift and slide mechanism for ease of opening


GLAZING OPTIONS

Internally glazed for 61mm glazing

CHOICE OF FINISH

Available in any single RAL colour, dual colour, textured or an anodised finish

TECHNICAL DRAWINGS

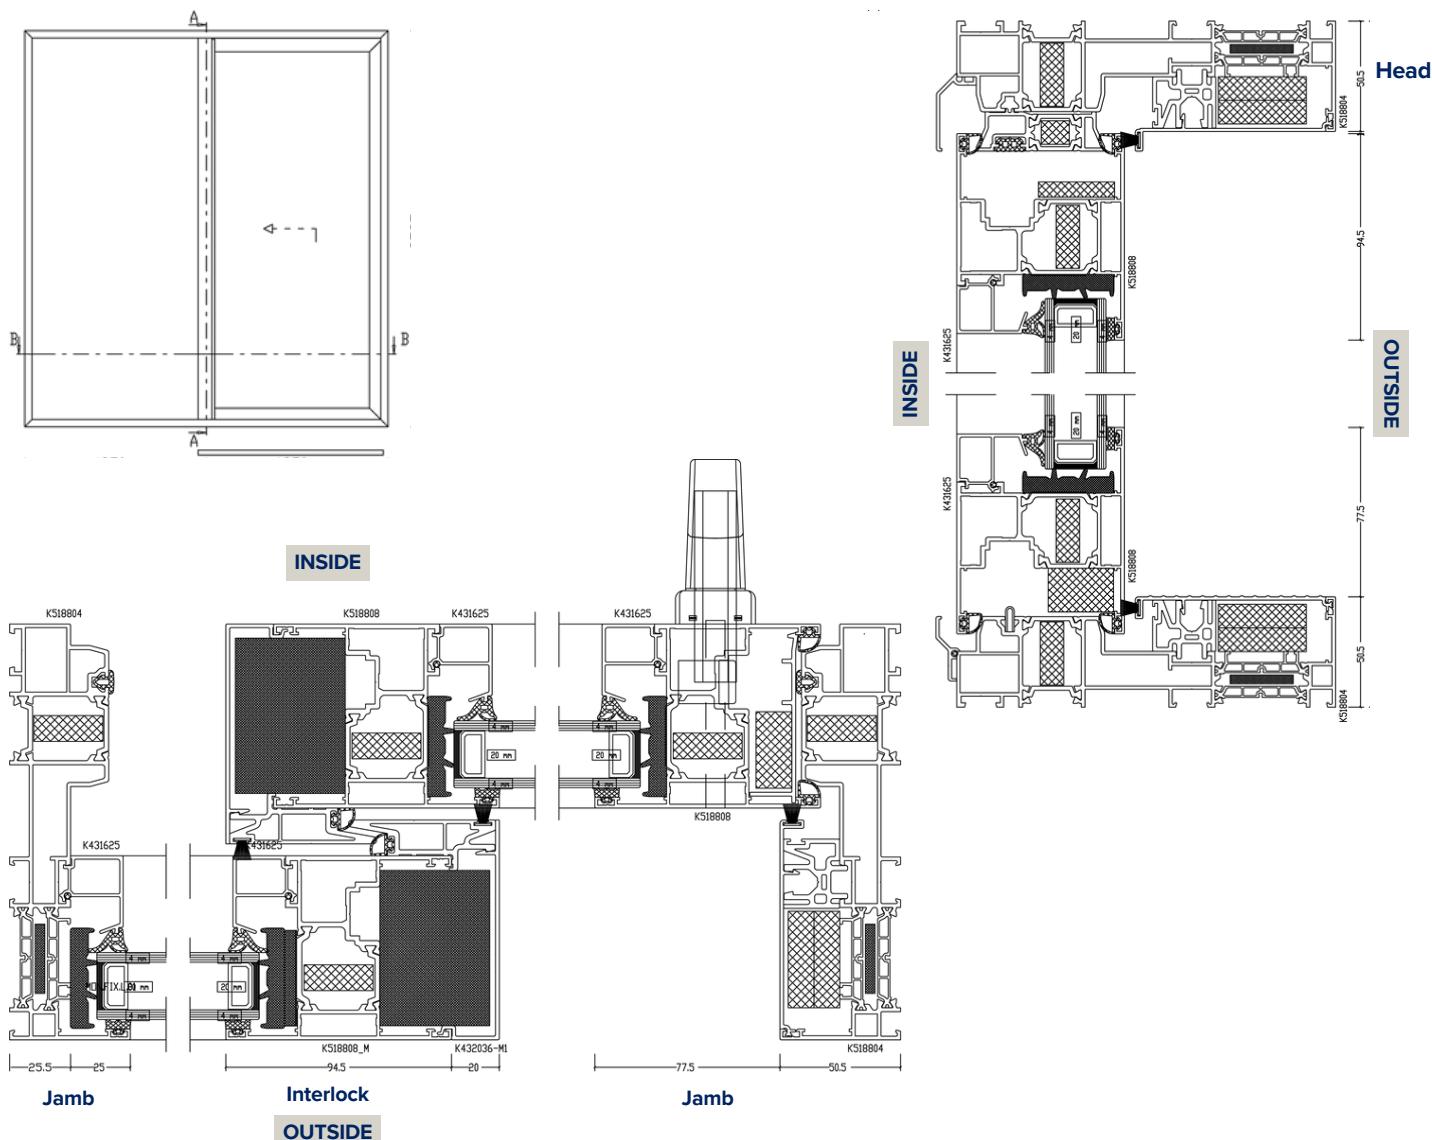

SIZE & WEIGHT LIMITS	
Max Frame Height	3300mm
Max Vent Width	3300mm
Max Vent Weight	600kg

SIGHTLINES	
Head	51-157mm
Cill	51-135mm
Jamb	51-135mm
Interlock	50-126mm

PERFORMANCE	
U-Value Double Glazing	(Ug = 1.0 W/m ² K) 1.2 W/m ² K
U-Value Triple Glazing	(Ug = 0.5 W/m ² K) 0.8 W/m ² K
Air Permeability	Class 4 (600 Pa)
Water Tightness	Class 9a (600 Pa)
Wind Resistance	C4 (1200 Pa)

BUILDING REGULATIONS	
Part L	Compliant
Part F	Compliant
Part M	Compliant

FINISHES	
Single Colour	✓
Dual Colour	✓
Textured Finish	✓
Anodised Finish	✓

DETAILS	
Glazing Thickness	61mm
Frame Depth 2 track	174mm
Frame Depth 3 track	271mm